PAcNOG I Workshop: FreeBSD Install

FreeBSD is designed to be a server operating system. This becomes apparent during the installation process. The FreeBSD installer is a console-based (not GUI) install process. In addition, installation of desktop features such as Gnome and KDE is only partially accomplished using the FreeBSD installer program.

For this workshop we are going to install a complete FreeBSD configuration. If you are interested in seeing an optional install that we have done in the past take a look at the Pre SANOG VI Workshop FreeBSD Install pages <u>here</u>.

The FreeBSD installer interface is not intuitive (your author's opinion), so pay close attention to the steps

Hint: Use the tab key to move between choices, but use the SPACE bar to select an item. Pay close attention to what is chosen before you press ENTER. This may save you from having to redo the installation process.

<u>Chapter 2</u> of the FreeBSD Handbook covers the entire installation process for FreeBSD in much more detail than we'll do here. <u>Chapter 5</u> covers configuring the X server, fonts, and your choice of Gnome or KDE desktop in excellent detail.

At this point you should have the FreeBSD Install Discs 1 and 2 with you.

Some Notes

- Some steps have screen captures to help you with the installation process, but not all steps.
- Please read the instructions in this document and on the screen entirely before taking action. If you don't you may make incorrect choices and possibly have to restart the installation process.
- If you are confused about any steps please ask the instructor or assistants for help.


Initial Boot from Install Disc 1

- Turn on the power for your machine.
- Immediately place the first CD-ROM of the FreeBSD 5.4 install set in your machine's CD-ROM drive.
- You'll see an initial boot menu with several choices. The first two choices look something like this:

```
    Boot FreeBSD [default]
    Boot FreeBSD with ACPI disabled
    ...
```

- Select the first choice, or just press ENTER.
- Now you'll see the *Sysinstall* main menu. During the workshop we'll use the Sysinstall utility on several occasions to do further configuration of our FreeBSD installations.

Sysinstall main menu

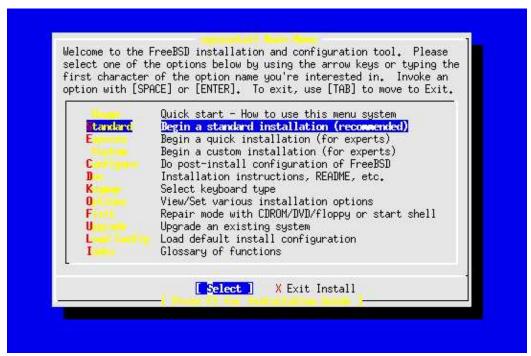

- Move the cursor down by using the DOWN-ARROW and select Standard. The press ENTER to select this choice. As you can see there are quite a number of additional options. Sysinstall not only steps you through installing FreeBSD, but it also allows you to do post-install configuration, such as installing additional software packages and sitributions. In addition you can set keyboard options, view documentation, configure network interfaces, multiple startup options, and so forth.
- Next you'll see a message indicating that you are about to partition your hard drive for a FreeBSD installation. If you have more than one hard drive, then you'll need to indicate which drive to work on. At this point press OK to continue.
- Now you'll see a screen that looks *something* like this:

fset	Size(ST)	End	Name	РТуре	Desc	Subtype	Flags
0	63	62	2	6	unused	0	
63	4193217	4193279	ad0s1	Z	fat	14	>
4193280	1008	4194287		6	unused	0	>
4194288	12319776	16514063	ad0s2	4	extended	15	>
e followi	ng commands	are support	ed (in u	pper or	lower case):	
= Use Ent	ire Disk	G = set Dri	ve Geome	try C	= Create S	lice F =	• `DD' mo
= Delete	Slice	Z = Toggle			= Set Boot	able I=	= Wizard
- Change	Туре	U = Undo Al	1 Change	s 0	= Finish		

Sample FDISK partition screen

READ and FOLLOW these instructions

- Assuming you have unused space on your hard drive, then you could highlight this partition and press "C" to Create Slice in this area. For purposes of the workshop we are going to use the entire drive, so press "A" now to use the entire drive for our FreeBSD installation.
- By pressing "A" you should end up with a single FreeBSD slice for the entire drive with the correct filesystem choice of 165 (FreeBSD) chosen.
- Now press "Q" to finish. This is not intuitive, but Q will actually save the information you just entered for use in a few more steps.
- Next you are prompted whether you wish to install a Boot Manager or not. This is an important decision. First here is what this screen looks like:

Sysinstall Boot Manager Menu

		boot selector that allows you to easily SD and any other operating systems on your machin
at boot	time. If you	a have more than one drive and want to boot the boot selector will also make it possible
to do so	(limitations	s in the PC BIOS usually prevent this otherwise).
one, sel	ect "standard	boot selector, or wish to replace an existing d". If you would prefer your Master Boot
Record t	o remain unto	ouched then select "None".
NOTE :	PC-DOS users	s will almost certainly require "None"!
		Install the FreeBSD Boot Manager
		Install a standard MBR (no boot manager) Leave the Master Boot Record untouched
		beave the master bost hecord antonenca
		a on a ounder

Now here is your decision matrix:

- 1. FreeBŠD is the *only* operating system on your machine: choose "Standard".
- 2. You have additional operating systems (Windows) and you wish to be able to start all of them: possibly choose "BootMgr".
- 3. You have another boot manager installed that can boot FreeBSD (i.e. Grub under Linux!): choose "None".
- As we are going to use the whole hard drive and just install FreeBSD during this workshop you should choose "Standard" at this point and press OK.

Pay attention...

- Now it's time to create partitions inside of the disk slice you created for FreeBSD. Press OK to the screen asking you if you want to do this.
- At this point the FreeBSD Disklabel Editor should present itself. Assuming we have used the entire drive on your machine your initial screen should look like this:

Sysinstall Disklabel Editor

Disk: a	l0 Partit	ion name:	ad0s1 Free	16514001 bloc	ks (8063MB)
Part	Mount	Size Ne 	wfs Part 	Mount 	Size Newfs
				or lower case)	
	ite D = `s Opts Q =			tllmdates	
				ilts R = Del	ete+Merge


Now it is time to create the various partitions we want to use. You instructor will step you through this, but in the end you should have something along these lines, naturally dependent on your disk size.

Partition	Size	Notes
/	512MB	You can get away 2ith 256MB if you prefer
swap	2xRAM or 512MB	filesystem type of "swap"
/tmp	512MB	If Linux support is installed, otherwise can be smaller
/var	4GB	Lots of software installs here. Needs space. (1GB minimum with r
		All system logs go here. On active server this could use lots of
/usr	Rest of disk	Normally /usr/home is here and everything else.
/u	4GB+	Our convention. Makes updating easier.

Remember to follow the instructor's suggestions in class for this section. It's common to make mistakes here and it's easy to fix if you are installing for the first time.

- When you are finished setting up the partitions in your slice, then press "Q" to leave the Disklabel editor.
- Next you'll be asked what distribution set you wish to install. This looks like:

Choose Distributions

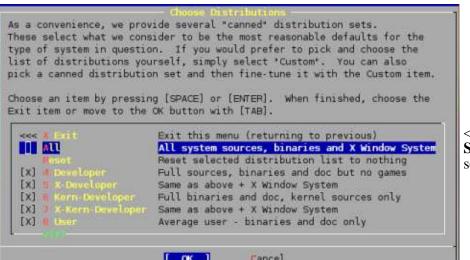

<== **CRITICAL** Use the **SPACE key** the first time to select, NOT tab.

For our workshop you should highlight "All", then press the SPACE key (not tab!). If you don't see all the Distributions selected with an "X", and/or you are not asked to install the Ports collection, then you have not correctly chosen "All".

- You should be prompted if you wish to install the Ports collection. Say "Yes" to this. We'll be using the Ports collection throughout the week to install additional software.
- Now, and this is a bit confusing, you are placed back in the Choose Distributions windows again. At this point you should use the UP-ARROW to move the cursor to the first choice, which is "X Exit". Once highlighted press ENTER to Exit from the menu.
- At this point you asked where your installation media resides. In our case it is on your CD/DVD-ROM drive. The menu prompt looks like this:

Choose Installation Media

	D from a supported CD/DVD drive then this is generally use if you have no overriding reason for using other
1 CD/DVD	Install from a FreeBSD CD/DVD
	Install from an FTP server
	Install from an FTP server through a firewall
4 10702	Install from an FTP server through a http proxy
5 002	Install from a DOS partition
6 102	Install over NFS
7 Fills Sustem	Install from an existing filesystem
8 Floren	Install from a floppy disk set
9 1610	Install from SCSI or QIC tape
	Go to the Options screen

You should leave the first option, CD/DVD highlighted and press ENTER for OK.

• You'll receive a confirmation and last chance warning before proceeding. Up to this point no changes have actually been saved to your disk. You could back out of the installation with absolutely no changes made. But, at this point we are ready to continue so press ENTER for "YES".

FreeBSD is installed!

At this point, technically speaking, FreeBSD is now installed on your machine. You could reboot your computer and FreeBSD would start. However, before doing this the Sysinstall utility gives you the opportunity to configure several important items. All of these items can be configured by hand, but the Syinstall utility has been designed to make this configuration much easier. So, the next 30, or so, steps are post-FreeBSD-installation items that we are going to take care of.

Post Installation

Say "yes" to doing post-installation configuration when prompted.

• The first item that will present itself is the Ethernet Device configuration menu. This looks something like (**note:** your ethernet device name may be different):

Ethernet Device Selection



In most cases you should simply press ENTER for "OK" to choose the first device. The FreeBSD kernel is pretty smart about detecting hardware and even smarter about detecting network hardware. Hopefully your network hardware has been correctly detected and is the first item listed.

- Choose "No" when prompted for IPv6 configuration.
- Choose "NO" to DHCP configuration.
- You'll see a network configuration window that looks something like this"

Set Network Configuration for "nn0"

Host:	Network Configuration Domain:
IPv4 Gateway:	Name server:
Configur IPv4 Address	ation for Interface xl0
Extra option	s to ifconfig (usually empty):
[_]	CANCEL

We are going to number our PCs starting from the first PC at the front of the classroom on the right. Your instructor will give you the following information to be filled in:

To Be Filled In

- Host: pcnn (instructor will specify this)
- Domain: pacnog.school.fj
- IPv4 Gateway: 202.62.125.61
 Name server: 202.62.124.238
- IPv4 Address: 202.62.122.nnn (instructor will specify this)
- Netmask: 255.255.255.224

Use the tab key to move through each field until you reach "OK", then press ENTER.

Remaining Steps

Now you'll receive numerous queries about items you can configure. The answers to these are:

- "No" to Network Gateway.
- "No" to inetd. [To be discussed later]
- "Yes" to ssh. [We may update later]
- "No" to anonymous FTP.
- "No" to NFS server.
- "No" to NFS client.
- "No" to customize console settings.
- "Yes" to set the timezone.
- "No" to the following prompt:

"Is this machine's CMOS clock set to UTC? If it is set to local time or you don't know, please choose NO here!"

Now you'll see a list of regions for your time zone that looks like this:

Select Your Region (Time Zone)

3.	Africa
	America North and South
	Antarctica
	Arctic Ocean
	Asia
	Atlantic Ocean
3	Australia
	Europe
9	Indian Ocean
	Pacific Ocean
G	Pacific Ocean
	[Cancel

Choose number 0, or "Pacific Ocean" and press ENTER for "OK".

- In the next list choose "Fiji" and press ENTER for "OK".
- Respond "Yes" to the 'FJT looks reasonable' prompt'.

Additional Steps

- "No" to Linux binary compatibility. [To be noted later.]
- "Yes" to PS/2 or Serial Mouse.

When you see the Select Mouse Protocol type menu, which looks like this:

Select Mouse Protocol

daemon. Specify a po	e text in the text console by running the mouse ort and a protocol type of your mouse and enable f you don't want this feature, select 6 to disable
Once you've enabled as your mouse device	the mouse daemon, you can specify "/dev/sysmouse" and "SysMouse" or "MouseSystems" as mouse g the X configuration utility (see Configuration
1 Exit 2 Enable 2 Type 4 Port 5 Flags 6 Disable	Exit this menu (returning to previous) Test and run the mouse daemon Select mouse protocol type Select mouse port Set additional flags Disable the mouse daemon
	Cancel


Choose number 2, "Enable" and press ENTER for "OK".

- If you move your mouse and you see the cursor moving on the screen, then press ENTER for "Yes" when asked, "Is the mouse cursor moving?"
- Move the cursor up to X or "Exit" and press ENTER to exit the mouse configuration menu. This step was not critical, but can be useful to allow you to copy and paste text using your mouse in console windows.

Additional Steps Continued

- Answer "No" to browsing Package collection. We'll add more Packages later.
- Answer "No" to adding a user account. We'll add user accounts after installation completes.
- Press ENTER for "OK" to set password for root account.
- The password we are going to use will be given out in class. **Please use this password and** *do not change it during the week* in case an instructor needs access to your machine to help with exercises.
- When prompted with, " Visit the general configuration menu for a chance to set any last options?" answer "No".
- Now you will be dropped back to the Sysinstall main menu:

Sysinstall Main Menu

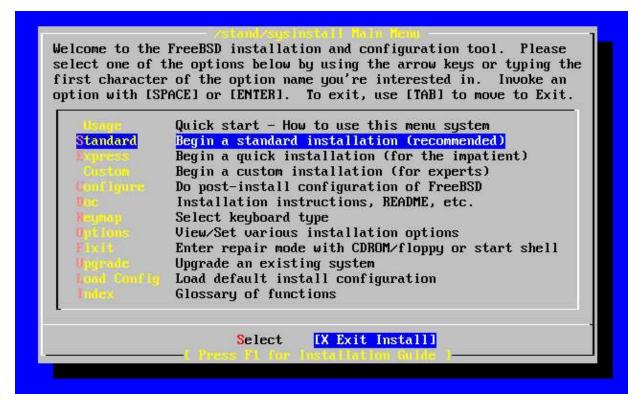

Move your cursor to highlight "X Exit Install" at the bottom of the menu (or just press "X"), and press ENTER to exit this menu.

• Answer "Yes" to exit and remove the FreeBSD Disc 1 CD-ROM from your machine's CD-ROM drive as it is rebooting.

After Initial Reboot

At this point you will be staring at your initial logon screen for FreeBSD 5.4, which should look something like this:

```
FreeBSD/i386 (pcnn.pacnog.school.fj) (ttyv0)
```

login: Password:

Please move on to the post-FreeBSD installation exercises that have been handed out and continue with these.

Last modified: Tue Jun 14 03:50:37 CLT 2005